

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

1300 I STREET, N. W.
WASHINGTON, DC 20005-3315

202 • 408 • 4000
FACSIMILE 202 • 408 • 4400

JC530 U.S. PTO
09/517186
03/02/00

ATLANTA
404•653•6400
PALO ALTO
650•849•6600

WRITER'S DIRECT DIAL NUMBER:

TOKYO
011•813•3431•6943
BRUSSELS
011•322•646•0353

(202) 408-4024

March 2, 2000

ATTORNEY DOCKET NO.: 04284.0830

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

New U.S. Patent Application
Title: WIRELESS INFORMATION STORAGE DEVICE AND METHOD
Inventor: Hisao TAKEMURA

Sir:

We enclose the following papers for filing in the United States Patent and Trademark Office in connection with the above patent application.

1. A check for \$808.00 representing a \$690.00 filing fee a \$78.00 additional claim fee and \$40.00 for recording the Assignment.
2. Application - 20 pages, including 4 independent claims and 11 claims total.
3. Drawings - 8 sheets of formal drawings containing 13 figures.
4. Copy of Declaration and Power of Attorney.
5. Recordation Form Cover Sheet and Copy of Assignment to KABUSHIKI KAISHA TOSHIBA.
6. Certified copy of Japanese Patent Application No. 11-055710, filed March 3, 1999.

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

Assistant Commissioner for Patents

March 2, 2000

Page 2

Applicant claims the right to priority based on Japanese Patent Application No. 11-055710, filed March 3, 1999.

Please accord this application a serial number and filing date and record and return the Assignment to the undersigned.

The Commissioner is hereby authorized to charge any additional filing fees due and any other fees due under 37 C.F.R. § 1.16 or § 1.17 during the pendency of this application to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

By: 

Richard V. Burgujian
Reg. No. 31,744

RVB/FPD/ts
Enclosures

UNITED STATES PATENT APPLICATION
OF
HISAO TAKEMURA
FOR
WIRELESS INFORMATION STORAGE DEVICE AND METHOD

BACKGROUND OF THE INVENTION

I. Field of the Invention

The present invention generally relates to a wireless information storage device and a method for putting a wireless information storage device on or into an article. More particularly, the present invention relates to a device and a method for achieving both certainty and efficiency of a plurality of wireless information storage devices being communicated by a reader/writer system at a time.

II. Background and Material Information

A wireless information storage device, such as a wireless card or a wireless tag, has recently attracted a great deal of attention as an internal information carrier of the next generation because of its capability to read and write information with an external reader/writer system while being not being connected to the external system.

The wireless information storage device comprises a loop-shaped coil antenna that transmits signals to and receives signals from a wireless transmitter/receiver via wireless communication. The wireless transmitter/receiver comprises a large scale integrated circuit (LSI) and a memory for storing information. The wireless transmitter/receiver generates information, such as read, write, or command data, by demodulating a signal received via a coil antenna. The wireless transmitter/receiver also generates a signal to be transmitted via the coil antenna by modulating information. Both the antenna and the wireless transmitter/receiver may be molded in a plastic case hereinafter referred to as "molded case."

A multi-reader/writer system is used to communicate with the wireless information storage device. The multi-reader/writer system communicates with a plurality of wireless storage devices using single antenna. However, to effectively communicate, the multi-reader/writer system requires that the wireless information storage devices are not perfectly stacked, and thus not aligned so that the system could process information unerringly.

That is, if every molded case to be communicated with at a time has a same shape, and also has a same shaped built-in coil antenna in the same position, a 'coupling coil' that is composed of all the aligned coil antennas is created. The coupling coil causes a shift of the resonance point of each wireless information storage device. Furthermore, as the number of wireless information storage devices perfectly stacked increases, an electromotive force generated in the coil antenna of each of the wireless information storage devices is weakened because a magnetic flux going through the coil antenna is weakened.

Thus, when a plurality of wireless information storage devices is perfectly stacked, the multi-reader/writer system can not process information unerringly. Therefore, the efficiency for processing information for each wireless information storage device is low.

Furthermore, in case that each of a plurality of wireless information storage devices is located at the same position of an item, such as a compact disc (CD), to be communicated at a time, the efficiency for processing information for each item is low by the same reason.

SUMMARY OF THE INVENTION

In view of the foregoing, the present invention solves the inherent limitations of existing wireless information storage device and a method for putting a wireless information storage device on or into an item that substantially obviates one or more of the problems due to limitations and disadvantages of the past approaches.

In accordance with an aspect of the present invention, as embodied and broadly described, the present invention is directed to a wireless information storage device. The device comprises a coil antenna, a memory, a control unit, and a molded case. The coil antenna having a two-dimensional center for transmits and/or receives a signal via wireless communication. The memory stores information. The control unit that generates information by demodulating a signal received via the coil antenna, and generates a signal to be transmitted via the coil antenna by modulating information stored in the memory. The mold case includes the coil antenna. The two-dimensional center of the coil antenna is off from the two-dimensional center of the molded case.

Also in accordance with an aspect of the present invention, there is provided a wireless information storage device. The device comprises a coil antenna, a memory, a control, and a molded case. The coil antenna has a two-dimensional center for transmitting and/or receiving a signal via wireless communication transmitting and/or receiving a signal via wireless communication. The memory stores information. The control unit generates information by demodulating a signal received via the coil antenna, and generates a signal to be transmitted via the coil antenna by modulating information stored in the memory. The mold case having a

two-dimensional center includes the coil antenna. Each coil antenna is located at a position in the device relatively different from each other when a plurality of devices is perfectly stacked.

Further in accordance with an aspect of the present invention, there is provided an item. The item has a two-dimensional center, and contains a wireless information storage device. The wireless information storage device also has a two-dimensional center. The item comprises a coil antenna, a memory, a control unit, and a molded case. The coil antenna transmits and/or receives a signal via wireless communication. The memory stores information. The control unit generates information by demodulating a signal received via the coil antenna, and generates a signal to be transmitted via the coil antenna by modulating information stored in the memory. The molded case includes the coil antenna. The two-dimensional center of the wireless information storage device is off from the two-dimensional center of the item.

In accordance with another aspect of the present invention, there is provided a method for putting a wireless information storage device containing a coil antenna and a board-shaped molded case on or into a board-shaped item having a two-dimensional center. The method comprises the step of putting the wireless information storage device on or into the two-dimensional center of the item.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention, as claimed. Further features and/or variations may be provided in addition to those set forth herein.

For example, the present invention may be directed to various combinations and subcombinations of the disclosed features and/or combinations and subcombinations of several further features disclosed below in the detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate various embodiments and/or features of the invention and together with the description, serve to explain the principles of the invention. In the drawings:

FIG. 1(a) is an exemplary horizontal cross section of a wireless information storage device 100 according to a first embodiment of the present invention;

FIG. 1(b) is an exemplary vertical cross section of wireless information storage device 100 sectioned at a line A-A shown in FIG. 1(a);

FIG. 2 is an exemplary block diagram depicting the configuration of wireless transmitter/receiver 104;

FIG. 3(a) is an exemplary diagram depicting locations of a plurality of antennas 102 of stacked wireless information storage devices 100, viewed from the direction perpendicular to the plane surface of molded case 106;

FIG. 3(b) is an exemplary diagram depicting locations of a plurality of antennas 102 of stacked wireless information storage devices 100, viewed from the direction parallel to the plane surface of molded case 106;

FIG. 4 is an exemplary block diagram depicting the configuration of reader/writer system 400;

FIG. 5(a) is an exemplary horizontal cross section of a wireless information storage device 100 according to a second embodiment of the present invention;

FIG. 5(b) is an exemplary vertical cross section of wireless information storage device 100 sectioned at a line B-B shown in FIG. 5(a);

FIG. 6(a) is an exemplary diagram depicting locations of a plurality of antennas 502 of stacked wireless information storage devices 500, viewed from the direction perpendicular to the plane surface of molded case 506;

FIG. 6(b) is an exemplary diagram depicting locations of a plurality of antennas 502 of stacked wireless information storage devices 500, viewed from the direction parallel to the plane surface of molded case 506;

FIG. 7 is an exemplary horizontal cross section of a wireless information storage device 700 included in or attached with an article, according to a third embodiment of the present invention;

FIG. 8(a) is an exemplary diagram depicting locations of a plurality of wireless information storage device 700 of stacked item 800, viewed from the direction perpendicular to the plane surface of item 800; and

FIG. 6(b) is an exemplary diagram depicting locations of a plurality of wireless information storage device 700 of stacked item 800, viewed from the direction parallel to the plane surface of article 800.

DETAILED DESCRIPTION

The various aspects and features of the present invention will be hereinafter described with reference to the accompanying drawings.

FIG. 1(a) is an exemplary horizontal cross section of a wireless information storage device 100 according to a first embodiment of the present invention. FIG. 1(b) is an exemplary vertical cross section of wireless information storage device 100 sectioned at a line A-A shown in FIG. 1(a).

Wireless information storage device 100 such as a wireless tag is included in or attached to an item (not shown). An external reader/writer system (further described below) reads information regarding the item from wireless information storage device 100 and writes information to wireless information storage device 100 as needed using a wireless communication.

Wireless information storage device 100 comprises an antenna 102, a wireless transmitter/receiver 104, and a molded case 106.

Antenna 102, which has a loop-shaped coil, transmits signals to wireless transmitter/receiver 104 and also receives signals from wireless transmitter/receiver 104. Wireless transmitter/receiver 104, which comprises a large scale integrated circuit (LSI), generates information by demodulating a received signal. Wireless transmitter/receiver 104 also generates a signal to be transmitted by modulating information stored in a memory (further described below). Molded case 106 includes antenna 102 and wireless transmitter/receiver 104.

Antenna 102 and wireless transmitter/receiver 104 are connected to

each other via conductors 108a and 108b. Molded case 106 may be a round-and-board-shaped disk. Molded case 106 may be 20mm in diameter and 3-5mm thick.

As shown in FIG. 1(a), loop-shaped coil antenna 102 is located with its center C1 off centered from the center C2 (i.e., gravitational center) of round-shaped molded case 106. In other words, as shown in FIG. 1(b), loop-shaped coil antenna 102 is located with its central axis L1 being approximately parallel to an axis perpendicular to the plane surface of molded case 106 and also off centered from central axis L2 of molded case 106.

As described above, wireless information storage device 100 is produced with antenna 102, which is included in or attached to wireless information storage device 100, purposely off centered from the center of the molded case 106.

FIG. 2 is an exemplary block diagram depicting the configuration of wireless transmitter/receiver 104.

Wireless transmitter/receiver 104 comprises a power generator 200, a clock generator 202, a demodulator 204, a modulator 206, a controller 208, and a nonvolatile memory 210.

Power generator 200 generates electric power to be provided to each internal part of the device 100 by both rectifying and ballasting a signal received via antenna 102. Clock generator 202 generates a clock pulse from a received signal and supplies the clock pulse to each internal part. Demodulator 204 generates information to be stored in nonvolatile memory 210 by demodulating a received signal.

Modulator 206 generates a signal to be transmitted by modulating information stored in nonvolatile memory 210. Controller 208 controls reading and writing information with nonvolatile memory 210.

Nonvolatile memory 210 stores information used for controlling wireless transmitter/receiver 104, information regarding wireless information storage device 100, such as an ID, and information regarding the location of an item.

FIG. 3(a) is an exemplary diagram depicting locations of a plurality of antennas 102 of stacked up wireless information storage devices 100, viewed from the direction perpendicular to the plane surface of molded case 106. FIG. 3(b) is an exemplary diagram depicting locations of a plurality of antennas 102 of stacked wireless information storage devices 100, viewed from the direction parallel to the plane surface of molded case 106.

When a plurality of wireless information storage devices 100 is perfectly stacked as shown in FIG. 3(b), there is little possibility of these antennas 102, e.g., 102a, 102b, 102c, ..., and 102z, being located at the same position because each antenna 102 is not located at the center of molded cases 106, e.g., 106a, 106b, 106c, ..., and 106z, as shown in FIG. 3(a). In other words, there is little possibility of the center axis of one of antennas 102 being located at the same position as the center axis of another antenna 102 is located.

FIG. 4 is an exemplary block diagram depicting the configuration of reader/writer system 400.

Reader/writer system 400 reads information from the above-

described wireless information storage device 102 and also writes information into the above-described wireless information storage device 102 as needed, using a wireless communications. Reader/writer system 400 comprises an antenna box 402, a computer 404, and a cable 406 to connect antenna box 402 and computer 404.

Reader/writer system 400 communicates with perfectly “M” stacked wireless information storage devices 102 in a line and “N” bunches of the devices 102 in a line.

When wireless information storage device 102 enters into an area where reader/writer system 400 can communicate, computer 404 instructs antenna box 402 to output a radio wave signal.

In each wireless information storage device 102, antenna 102 receives the radio wave signal, transforms the radio wave signal into electric signal, and provides the electric signal to both power generator 200 and clock generator 202. Power generator 200 generates electric power necessary to drive each internal part using the electric signal and supplies the electric power to each internal part. Clock generator 202 generates a clock pulse from the electric signal and supplies the clock to each internal part.

Antenna 102 also provides the electric signal to demodulator 204. Demodulator 204 generates information by demodulating the electric signal. Controller 208 then stores the generated information into nonvolatile memory 210.

When controller 208 receives a signal used for a reading information from modulator 204, controller 208 determines the necessity

of transmitting information. Controller 208 reads the information from nonvolatile memory 210 and outputs the information to modulator 206.

Modulator 206 modulates the information into a signal and transmits the signal to reader/writer system 400 via antenna 102.

5 Reader/writer system 400 receives the transmitted signal via antenna box 402 and computer 404 processes the information read from nonvolatile memory 210.

As described above, even if a plurality of wireless information storage devices 100 is perfectly stacked in the direction perpendicular to the plane surface of those wireless information storage devices 100, there
10 is little possibility of antennas 102 being located same position because each loop-shaped antenna 102 is not located in the center of each wireless information storage device 100.

Therefore, there is little possibility of some antennas 102
15 composing a coupling coil. As such, it is possible to read information from and write information into every wireless information storage device 100 instantaneously and with certainty. It is also possible to communicate with wireless information storage devices 100 and an item with wireless information storage device 100 efficiently and with
20 certainty.

Next, wireless information storage device 100 comprising a molded case having other shape will be hereinafter described.

FIG. 5(a) is an exemplary horizontal cross section of a wireless information storage device 100 according to a second embodiment of the
25 present invention. FIG. 5(b) is an exemplary vertical cross section of

wireless information storage device 100 sectioned at a line B-B shown in FIG. 5(a).

Wireless information storage device 500 comprises a loop-shaped antenna 502, a wireless transmitter/receiver 504, and a rectangle-shaped molded case 506. Antenna 502 and wireless transmitter/receiver 504 are connected to each other via conductors 508a and 508b.

As shown in FIG. 5(a), loop-shaped coil antenna 502 is located with its center C3 off centered from the center C4 (i.e., gravitational center) of round-shaped molded case 506. In other words, as shown in FIG. 5(b), loop-shaped coil antenna 502 is located with its central axis L3 being approximately parallel to an axis perpendicular to the plane surface of molded case 506 and also off centered from central axis L4 of molded case 506.

FIG. 6(a) is an exemplary diagram depicting locations of a plurality of antennas 502 of stacked wireless information storage devices 500, viewed from the direction perpendicular to the plane surface of molded case 506. FIG. 6(b) is an exemplary diagram depicting locations of a plurality of antennas 502 of piled up wireless information storage devices 500, viewed from the direction parallel to the plane surface of molded case 506.

When a plurality of wireless information storage devices 500 is perfectly stacked and aligned as shown in FIG. 6(b), there is little possibility of these antennas 502, e.g., 502a, 502b, 502c, ..., and 502z, being located at the same position because each antenna 502 is not located at the center of molded case 506, e.g., 506a, 506b, 506c, ..., and

506z, as shown in FIG. 6(a). In other words, there is little possibility of the center axis of one of antennas 502 being located at the same position as when the center axis of other antenna 502 is located.

Therefore, there is little possibility of some antennas 502
5 composing a coupling coil. It is possible to read information from and write information into every wireless information storage device 500 instantaneously and with certainty. As a result, it is possible to communicate with wireless information storage devices 500 and an item with wireless information storage device 500 efficiently and with
10 certainty.

Next, a method for putting a wireless information storage device 700 on or into an item will be hereinafter described. The item is composed of a nonmetallic material or metallic material which does not influence wireless communication.

15 FIG. 7 is an exemplary horizontal cross section of wireless information storage device 700 included in or attached with an article, according to a third embodiment of the present invention.

Wireless information storage device 700 comprises a loop-shaped antenna 702, a wireless transmitter/receiver 704, and a rectangle-shaped
20 mold case 706. Antenna 702 and wireless transmitter/receiver 704 are connected to each other via conductors 708a and 708b.

FIG. 8(a) is an exemplary diagram depicting locations of a plurality of wireless information storage device 700 of stacked items 800, viewed from the direction perpendicular to the plane surface of item 800. FIG.
25 6(b) is an exemplary diagram depicting locations of a plurality of

wireless information storage device 700 of piled up items 800, viewed from the direction parallel to the plane surface of item 800.

As shown in FIG. 8(a), wireless information storage device 700, e.g., 700a, 700b, 700c, ..., and 700z, is located off from a two-dimensional center of gravity C5. When a plurality of item 800, e.g., 800a, 800b, 800c, ..., and 800z, is perfectly stacked as shown in FIG. 8(b), there is little possibility of these wireless information storage device 700 being located at the same position because each wireless information storage device 700 is not located at the center of item 800 as shown in FIG. 8(a). In other words, there is little possibility of the center axis of one of antennas 702 being located at the same position as the center axis of other antenna 702 is located.

Therefore, there is little possibility of some antennas 702 composing a coupling coil. It is possible to read information from and write information into every wireless information storage device 700 instantaneously and with certainty. As a result, it is possible to communicate with wireless information storage device 700 and an item with wireless information storage device 700 efficiently and with certainty.

As described above, consistent with the principles of the present invention, even if a plurality of wireless information storage devices or items included in or attached to wireless information storage devices are perfectly stacked, it is possible to read information from or write information into those wireless information storage devices with certainty at the time, furthermore, it is possible to improve

communications with efficiency of the wireless information storage device or the item.

Other embodiments of the present invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the present invention being indicated by the following claims.

5

WHAT IS CLAIMED IS:

1. A wireless information storage device, comprising:
a coil antenna having a two-dimensional center for transmitting and/or receiving a signal via
5 wireless communication;
a memory for storing information;
a control unit that generates information by demodulating a signal
received via the coil antenna, and generates a signal to be transmitted via
10 the coil antenna by modulating information stored in the memory; and
a molded case including the coil antenna, wherein the two-dimensional center of the coil antenna is off from the two-dimensional center of the molded case.

15 2. The device of claim 1, wherein:
the molded case has a board-shape; and
the central axis of the coil antenna is approximately parallel to an
axis perpendicular to plane surface of the molded case, and off from the
two-dimensional center of the plane surface of the molded case.

20 3. The device of claim 1, wherein the molded case has a loop-shape.

25 4. The device of claim 1, wherein the molded case has a round shape.

5. The device of claim 1, wherein the control unit further comprises:

a demodulator that generates information by demodulating the received signal;

a modulator that generates the transmitted signal by modulating the stored information; and

a controller that controls reading and writing information.

6. The device of claim 1, wherein the memory is a nonvolatile memory.

7. The device of claim 1, wherein the molded case further includes the memory and the control unit.

8. A wireless information storage device, comprising:

a coil antenna having a two-dimensional center for transmitting and/or receiving a signal via wireless communication;

a memory for storing information;

a control unit that generates information by demodulating a signal received via the coil antenna, and generates a signal to be transmitted via the coil antenna by modulating information stored in the memory; and

a molded case having a two-dimensional center including the coil antenna, wherein each coil antenna is located at a position in the device relatively different from each other when a plurality of devices is

stacked.

9. The device of claim 8, wherein the position is a place where the two-dimensional center of the coil antenna is off from the two-dimensional center of the molded case.

10. A method for putting a wireless information storage device on or into an item having a two-dimensional center, the device which comprises a coil antenna and a molded case having a two-dimensional center including the coil antenna, comprising the step of:

putting the device on or into the item, with the two-dimensional center of the molded case being off from the two-dimensional center of the item.

11. A method for putting a wireless information storage device on or into an item having a two-dimensional center, the device which comprises a coil antenna and a molded case having a two-dimensional center including the coil antenna, comprising the step of:

putting the device at a position in the item relatively different from each other when a plurality of item is stacked.

ABSTRACT OF THE DISCLOSURE

A wireless information storage device and method for putting the device on or into an item are disclosed. According to the disclosed device and method, even if a plurality of wireless information storage devices is perfectly stacked, it is possible to read information from or write information into those wireless information storage devices with certainty at a time, furthermore, it is possible to improve efficiency of communicating with the wireless information storage device or the item.

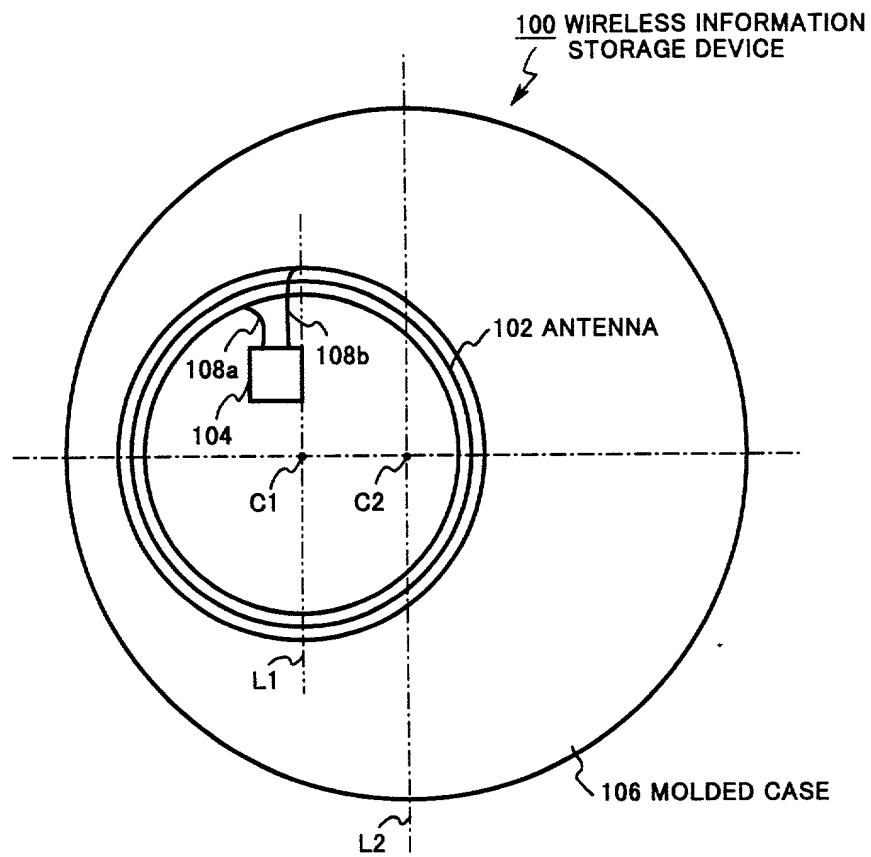


FIG. 1(a)

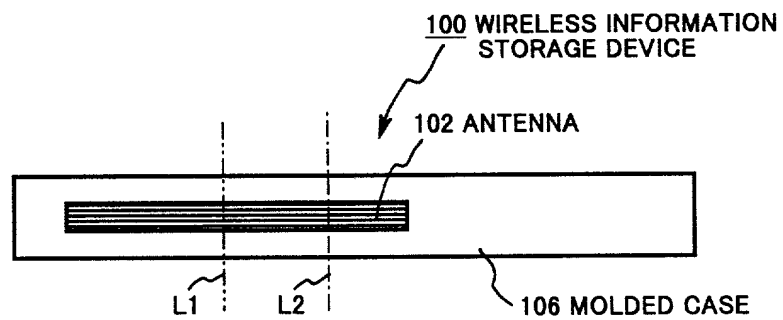


FIG. 1(b)

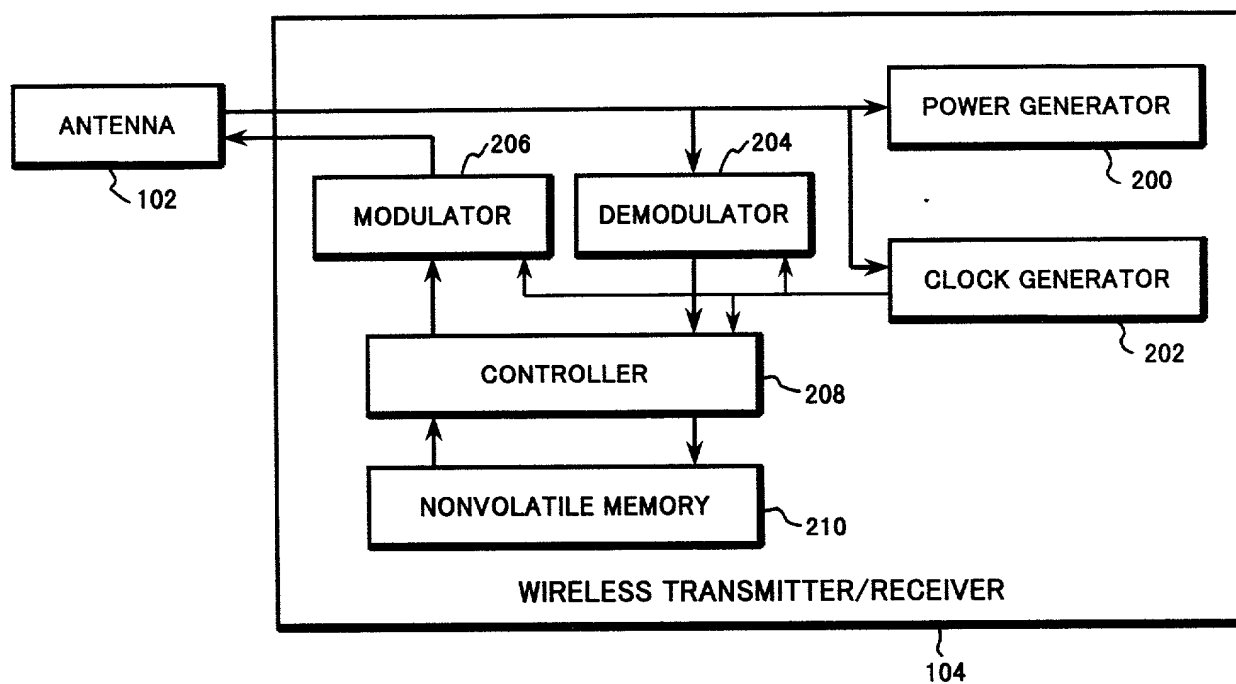


FIG. 2

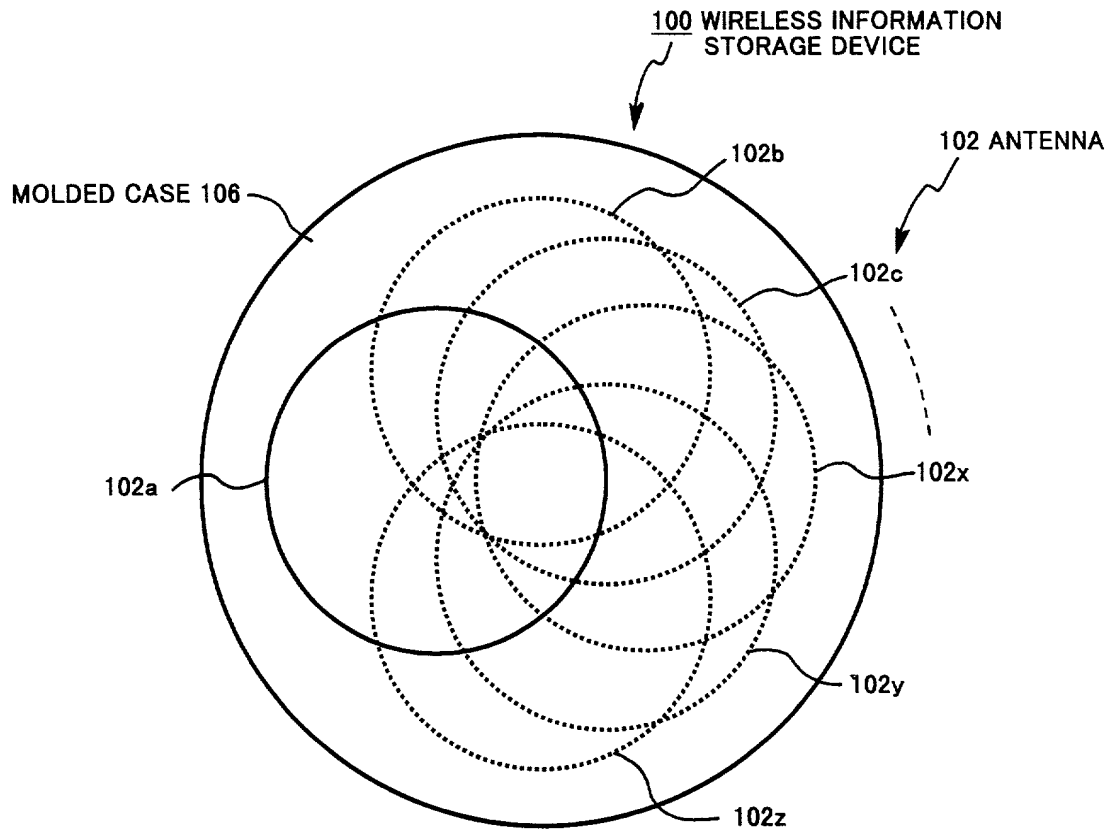


FIG. 3(a)

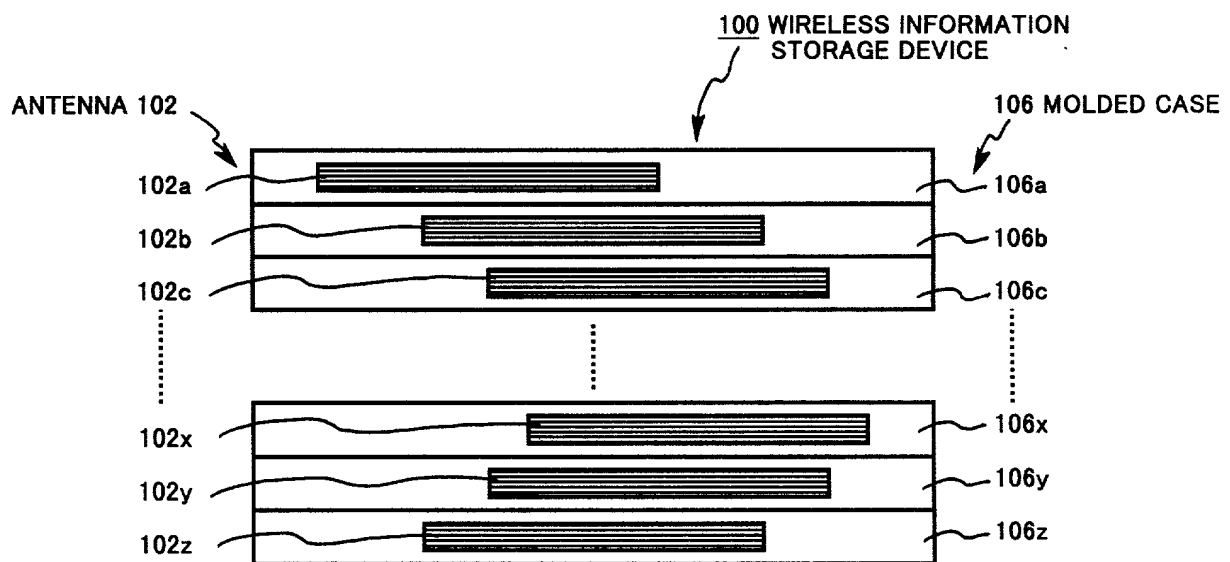


FIG. 3(b)

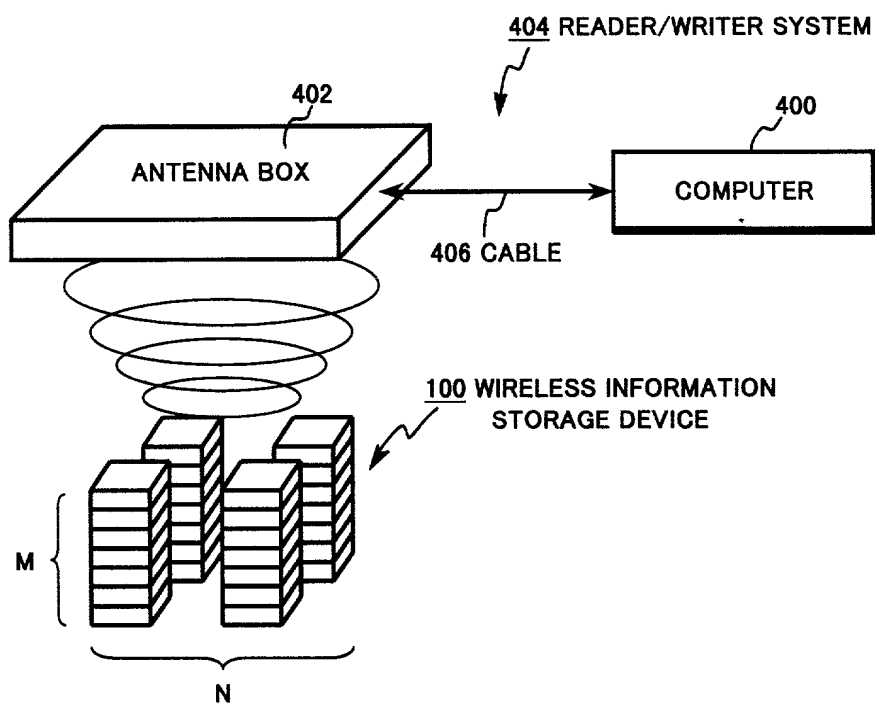


FIG. 4

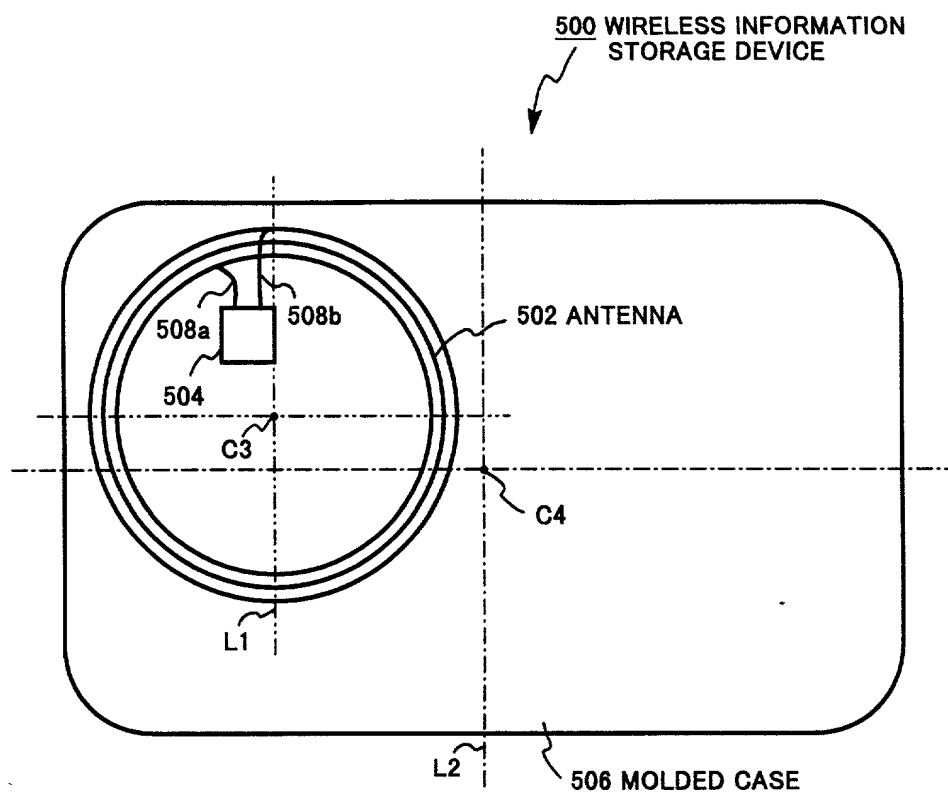


FIG. 5(a)

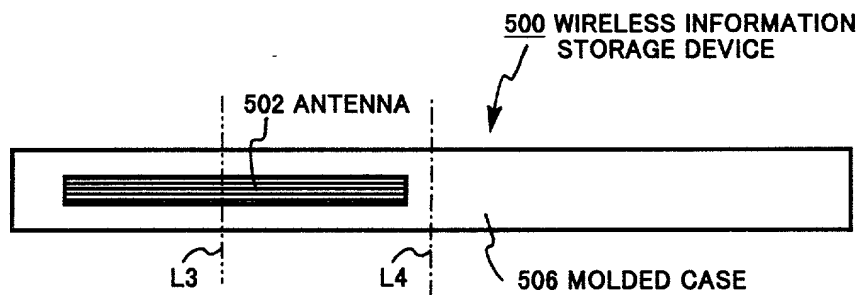


FIG. 5(b)

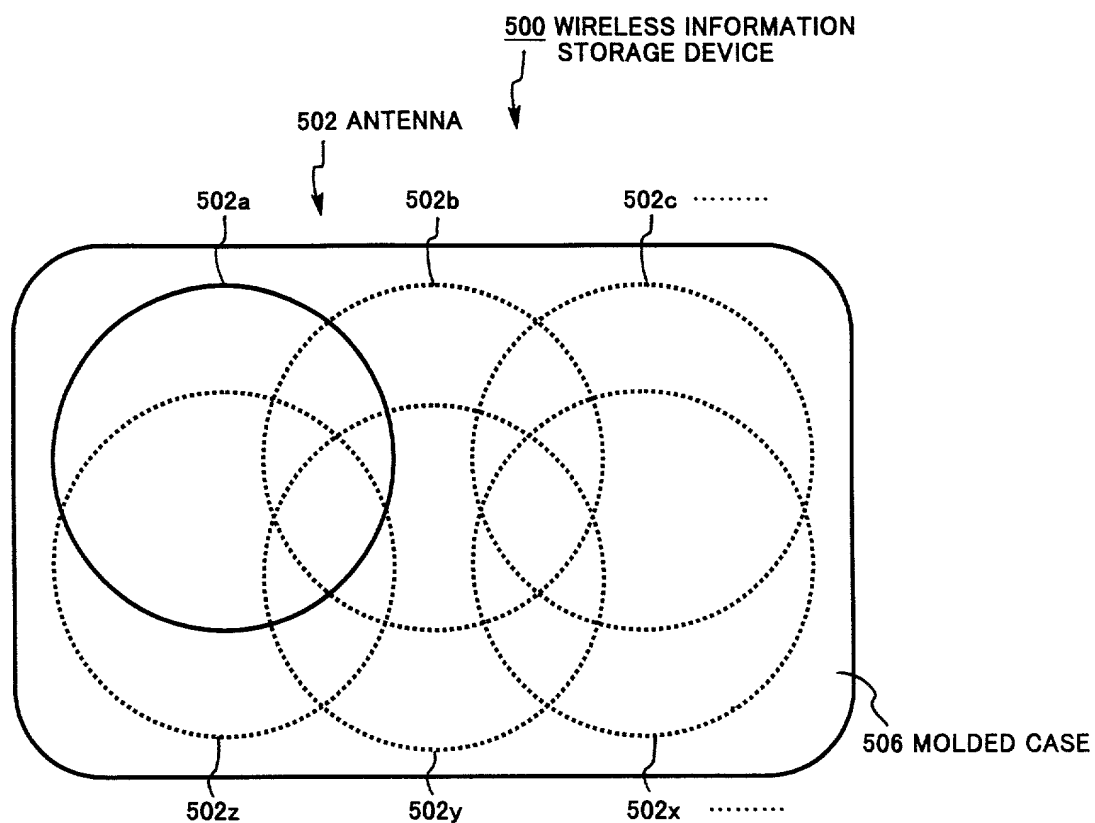


FIG. 6(a)

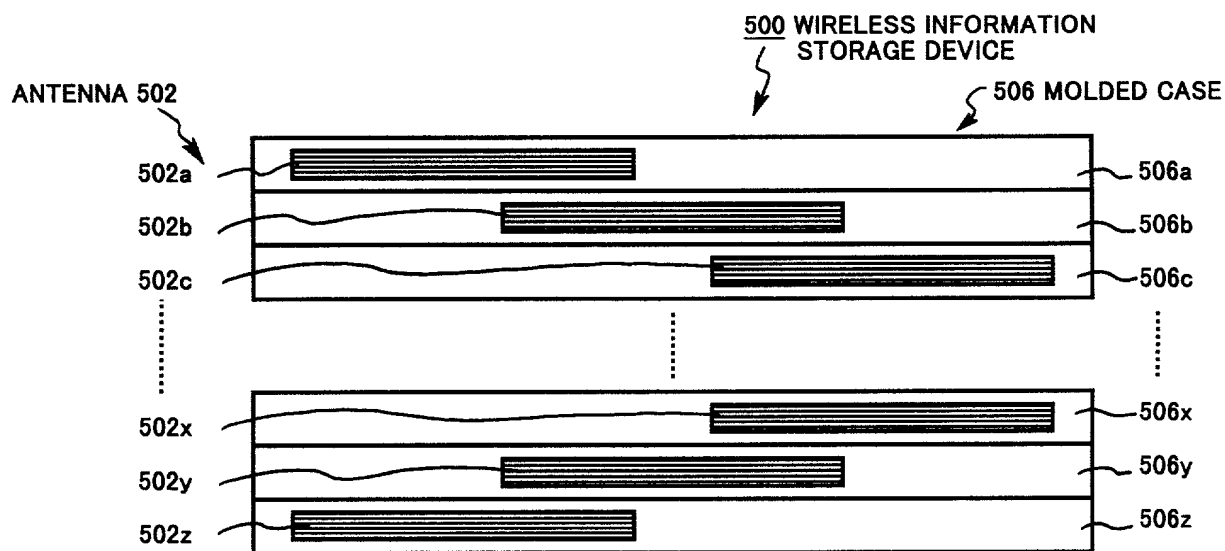


FIG. 6(b)

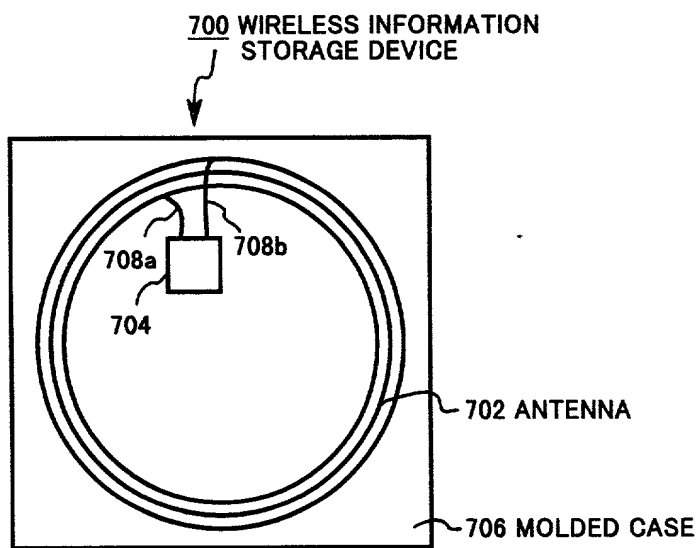


FIG. 7

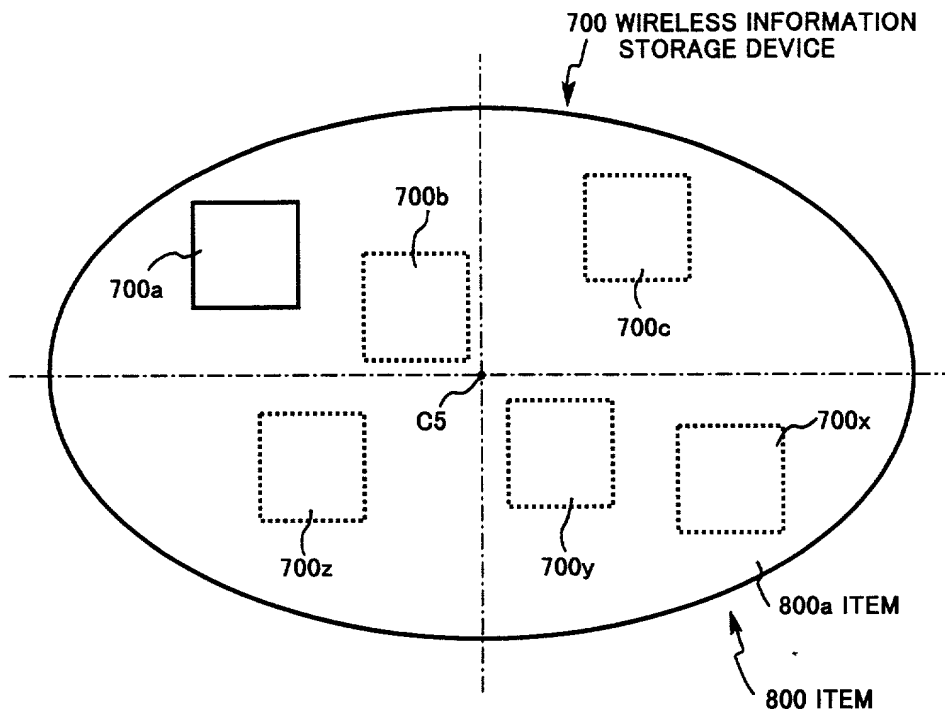


FIG. 8(a)

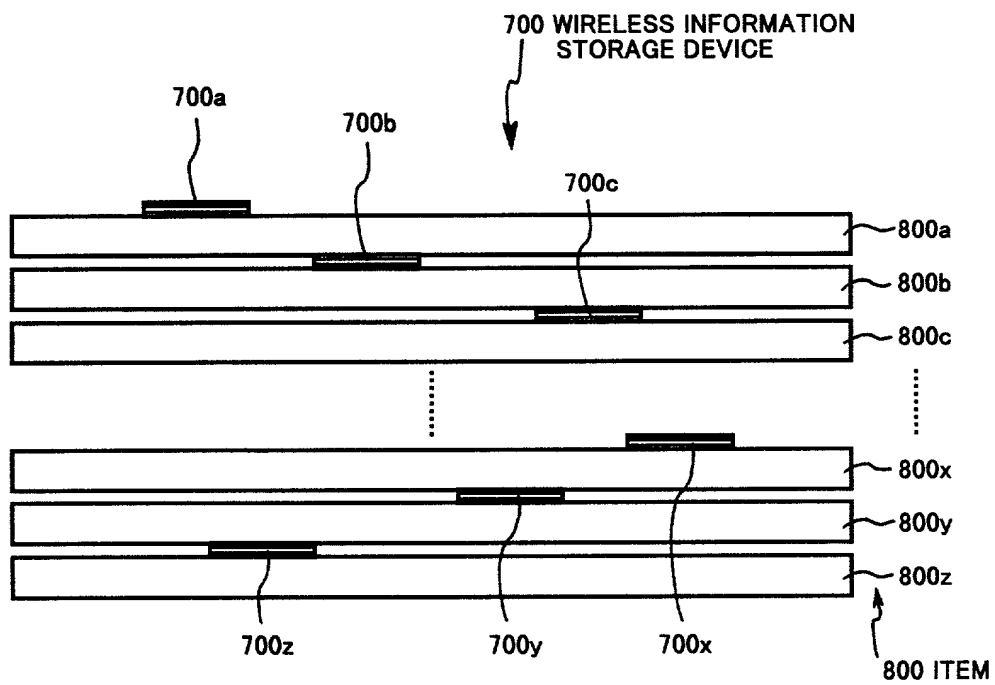


FIG. 8(b)

ATTORNEY DOCKET NO.: 4284.0830**DECLARATION/POWER OF ATTORNEY**

As a below-named inventor, I hereby declare that my residence, post office address, and citizenship are as stated below next to my name; that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

WIRELESS INFORMATION STORAGE DEVICE AND METHOD

The specification of which is attached.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application Number	Date of Filing	Priority Claimed
Japan	P11-055710	3/3/99	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any U.S. application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior U.S. application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international date of this application:

Application Number	Date of Filing	Status (patented/pending/abandoned)

I hereby appoint the following attorneys to prosecute this application and transact all business in the U.S. Patent and Trademark Office connected therewith: Finnegan, Henderson, Farabow, Garrett & Dunner, L.L.P., Reg. No. 22,540; Douglas B. Henderson, Reg. No. 20,291; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,030; Laurence R. Hefter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Elmer, Reg. No. 25,857; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 28,325; John M. Romary, Reg. No. 26,331; Bruce C. Zotter, Reg. No. 27,680; Dennis P. O'Reilley, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajelsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; Barry W. Graham, Reg. No. 29,924; Thomas H. Jenkins, Reg. No. 30,857; E. Robert Yoches, Reg. No. 30,120; Susan H. Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Robert E. Converse, Reg. No. 27,432; Christopher P. Foley, Reg. No. 31,354; Clair X. Mullen, Jr., Reg. No. 20,348; John C. Paul, Reg. No. 30,413; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara Clarke McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; Dirk D. Thomas, Reg. No. 32,600; Thomas W. Banks, Reg. No. 32,719;

Christopher P. Isaac, Reg. No. 32,616; Bryan C. Diner, Reg. No. 32,409; M. Paul Barker, Reg. No. 32,013; Vincent P. Kovalick, Reg. No. 32,867; David S. Forman, Reg. No. 33,694; James W. Edmondson, Reg. No. 33,871; Michael R. McGurk, Reg. No. 32,045; Joann M. Neth, Reg. No. 36,363; Gerson S. Panitch, Reg. No. 33,751; Cheri M. Taylor, Reg. No. 33,216; Charles E. Van Horn, Reg. No. 40,266; Linda A. Waddler, Reg. No. 33,218; Doris J. Hines, Reg. No. 34,629; Allen R. Jensen, Reg. No. 28,224; Lori-Ann Johnson, Reg. No. 34,498; and David A. Manspeizer, Reg. No. 37,540.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

HISAO TAKEMURA

FULL NAME OF SOLE OR FIRST INVENTOR

Hisao Takemura

INVENTOR'S SIGNATURE

2-Mar-2000

DATE

Kanagawa-Ken, JAPAN

RESIDENCE

Japan

CITIZENSHIP

c/o Toshiba Corporation, Intellectual Property Division

1-1-1, Shibaura, Minato-ku, Tokyo JAPAN

POST OFFICE ADDRESS